



Closure Plan

B.C. COBB GENERATING FACILITY

PONDS 0-8 CLOSURE PLAN

Muskegon, Michigan

Pursuant to 40 CFR 257.102

Submitted To: Consumers Energy Company
1945 W. Parnall Road
Jackson, Michigan 49201

Submitted By: Golder Associates Inc.
15851 South US 27, Suite 50
Lansing, Michigan 48906

October 2016

1652598

A world of
capabilities
delivered locally



**CERTIFICATION****Professional Engineer Certification Statement [40 CFR 257.102(b)(4)]**

I hereby certify that, having reviewed the attached documentation and being familiar with the provisions of Title 40 of the Code of Federal Regulations Section 257.102 (40 CFR Part 257.102), I attest that this Closure Plan is accurate and has been prepared in accordance with good engineering practices, including the consideration of applicable industry standards, and with the requirements of 40 CFR Part 257.102.

Golder Associates Inc.



Signature

October 14, 2016

Date of Report Certification

Jeffrey R. Piaskowski, PE

Name

6201061033

Professional Engineer Certification Number



10/14/16



Table of Contents

CERTIFICATION.....	C-1
Professional Engineer Certification Statement [40 CFR 257.102(b)(4)].....	C-1
1.0 INTRODUCTION.....	1
2.0 NARRATIVE DESCRIPTION [40 CFR 257.102(b)(1)(i, iii-v)].....	2
2.1 Ponds 0-8 CCR Quantity [40 CFR 257.102(b)(1)(iv-v)]	2
2.2 Closure Construction Sequence	3
2.2.1 Drainage and Stabilization of CCR Surface Impoundments Prior to Closure [40 CFR 257.102(b)(1)(i) and 40 CFR 257.102(d)(2)].....	3
2.2.1.1 Inundated CCR Stabilization.....	3
2.2.1.2 Dry CCR Stabilization	3
2.2.2 Final Cover System [40 CFR 257.102(b)(1)(iii) and 40 CFR 257.102(d)(3)].....	3
2.2.2.1 Final Cover Design and Performance.....	3
2.2.2.2 Final Cover Construction.....	5
3.0 SCHEDULE [40 CFR 257.102(b)(1)(vi)]	6
3.1 Introduction.....	6
3.2 Closure Construction.....	6
3.3 Closure Deadline Extension [40 CFR 257.102(f)(2)]	8
4.0 REFERENCES.....	9

List of Tables

Table 2.2.1	Ponds 0-8 Estimated CCR Quantity
Table 3.2.1	Closure Schedule Production Estimate
Table 3.2.2	Conceptual Final Cover Construction Schedule Milestones

List of Figures

Figure 1	Site Location Map
Figure 2	General Site Plan
Figure 3	Closure Grading Plan
Figure 3.1	Final Cover System



1.0 INTRODUCTION

On April 17, 2015, the United States Environmental Protection Agency (EPA) issued the Coal Combustion Residual (CCR) Resource Conservation and Recovery Act (RCRA) Rule (40 CFR 257 Subpart D) (“CCR RCRA Rule”) to regulate the beneficial use and disposal of CCR materials generated at coal-fired electrical power generating complexes. In accordance with the CCR RCRA Rule, any CCR surface impoundment or CCR landfill that was actively receiving CCRs on the effective date of the CCR RCRA Rule (October 19, 2015) was deemed to be an “Existing CCR Unit” on that date and subject to self-implementing compliance standards and schedules. Consumers Energy Company (CEC) identified two existing CCR surface impoundments at the B.C. Cobb Generating Facility (BC Cobb):

- Ponds 0-8
- Bottom Ash Pond

BC Cobb is located in Muskegon, Michigan as presented on Figure 1 – Site Location Map. The location of Ponds 0-8 is highlighted on Figure 2 – General Site Plan.

This written closure plan is being generated pursuant to 40 CFR 257.102(a) and describes the steps necessary to close the BC Cobb Ponds 0-8 CCR unit consistent with recognized and generally accepted good engineering practices.



2.0 NARRATIVE DESCRIPTION [40 CFR 257.102(b)(1)(i, iii-v)]

Ponds 0-8 at BC Cobb will be closed with CCR in place and capped with a final cover system over the CCR surface impoundment area. Prior to construction of the final cover, Ponds 0-8 will be dewatered by actively pumping the ponds' contents downstream to Pond 4 in a manner that maintains permitted effluent limits. Upon reaching an equilibrium groundwater elevation, active pumping will cease; and the influent and effluent pipe will be permanently capped to prevent subsequent filling of the ponds. Once dewatered, Ponds 0-8 will be backfilled to two feet below design grades provided on Figure 3 – Closure Grading Plan. Design grades will be reached with construction of a two-foot-thick final cover system designed with a 2.5 percent slope to meet performance standard requirements per 40 CFR 257.102(d)(3)(ii). Details of the closure construction are provided in the following sections.

2.1 Ponds 0-8 CCR Quantity [40 CFR 257.102(b)(1)(iv-v)]

Golder Associates Inc. (Golder) characterized CCR in Ponds 0-8 in October 2015. The sample characterization results were reported in Golder's B.C. Cobb Generating Facility Ash Pond Material Characterization Data Report dated February 12, 2016 (Golder 2016). Through visual observation, characterization sampling determined that the CCR in Ponds 0-8 extended to depths that ranged from 10 to 20 feet below mudline, which correlated to elevations of 565.2 to 578.0 (NAVD88). The largest total surface area of Ponds 0-8 requiring final cover is approximately 18.3 acres as identified on Figure 2 – General Site Plan. Individual pond areas vary between 0.6 and 3.6 acres and are provided in Table 2.1.1 – Ponds 0-8 Recorded CCR Quantity. The area that includes the interior dikes and access road that surrounds Ponds 0-8 is approximately 10.7 acres. The maximum inventory of CCR estimated for Ponds 0-8 was approximately 683,500 cubic yards (cy) which includes 240,000 cy in Ponds 0-8 and 43,500 cy in the surrounding dikes. The quantity of CCR contained in individual ponds is summarized in Table 2.1.1.

Table 2.1.1 – Ponds 0-8 Estimated CCR Quantity

Pond	CCR Volume (cy) ¹	CCR Area (acre)
Pond 0	41,971	3.6
Pond 1	43,444	2.8
Pond 2	25,929	2.6
Pond 3	27,624	2.7
Pond 4	29,932	2.5
Pond 5	17,965	1.2
Pond 6	10,934	0.6
Pond 7	19,551	1.0
Pond 8	22,557	1.2
Dikes	443,546	10.7
Total	683,453	28.9

Note: ¹cy = cubic yard



2.2 Closure Construction Sequence

2.2.1 *Drainage and Stabilization of CCR Surface Impoundments Prior to Closure [40 CFR 257.102(b)(1)(i) and 40 CFR 257.102(d)(2)]*

CCR sluicing into Ponds 0-8 has ceased since the commencement of decommissioning activities on April 15, 2016; however, non-CCR waste (contact water) continues to be collected and infiltrated from the unit. Before the final cover is installed, Ponds 0-8 will be dewatered by actively pumping ponded water through the permitted National Pollutant Discharge Elimination System (NPDES) outfall in a manner that maintains permitted effluent limits. Upon reaching an equilibrium groundwater elevation in Ponds 0-8, active pumping will cease, and the influent and effluent pipes will be permanently capped to prevent subsequent filling of the ponds. Golder's October 2015 investigation indicated that poorly graded, fine to medium sand underlies Ponds 0-8, which is expected to readily allow any stormwater received in the ponds to infiltrate with limited storage.

2.2.1.1 Inundated CCR Stabilization

Excavation of CCR from Ponds 0-8 may lower the pond bottom below the static groundwater elevation. In the event the pond bottom elevation is below the static groundwater elevation, the Michigan Department of Transportation (MDOT) "Treatment of Peat Marshes" (Method A-1) will be utilized to stabilize the CCR before constructing the final cover system. MDOT "Treatment of Peat Marshes" (Method A-1) utilizes sand placed with a rolling surcharge that is equal to two times the depth of the backfill.

2.2.1.2 Dry CCR Stabilization

Once dewatered and the free liquids are removed, CCR within Ponds 0-8 will be evaluated to determine whether the CCR materials have sufficient strength properties to accommodate and support the proposed closure grades. If the existing CCR materials above the static groundwater elevation do not have the strength to accommodate earthwork equipment and/or fill material required to meet the closure grades, then the CCR material will be stabilized as required prior to closure construction. Once filling begins, Golder anticipates some elastic settlement of the CCR will occur; but most of the settlement will occur immediately during closure construction (due to the granular nature of the CCR and fill materials), thus, limiting long term subsidence. Soft clay is present beneath Ponds 0-8 at a depth of approximately 40 feet below ground surface (bgs) (elevation 550 feet NAVD88). The clay is not expected to be a concern, because the surcharge from the nominal fill heights should not create sufficient stress to consolidate and create post-closure settlement concerns or areas of ponded water while utilizing 2.5 percent design slopes.

2.2.2 *Final Cover System [40 CFR 257.102(b)(1)(iii) and 40 CFR 257.102(d)(3)]*

2.2.2.1 Final Cover Design and Performance

The final cover system will be two-feet-thick and consist of a 40 mil linear low-density polyethylene (LLDPE) textured geomembrane (infiltration layer) overlain with an 8 ounce per square yard nonwoven geotextile




(cushion). The cushion will be overlain with an 18-inch-thick layer of fine to medium grained, well sorted sand (protective cover). The protective cover will be overlain with a six-inch-thick erosion layer. The erosion layer consists of topsoil, seed, fertilizer, and mulch in accordance with MDOT Standard Specification 816 – Turf Establishment. A typical detail of the final cover system is provided below in Figure 3.1 – Final Cover System.

Together, the final cover system is designed to:

- Provide a final cover permeability less than 1.0×10^{-5} centimeter per second (cm/sec)
- Control contaminated runoff
- Minimize the need for maintenance
- Control, minimize, or eliminate post-closure infiltration of liquids
- Minimize releases of CCR and leachate into ground and surface waters or the atmosphere
- Prevent the sloughing or movement of the liner

The system is designed with a minimum 2.5 percent slope to:

- Prevent/limit the future impoundment of water, sediment, and slurry
- Minimize erosion
- Prevent/control the release of waste
- Limit the effects of settlement/subsidence

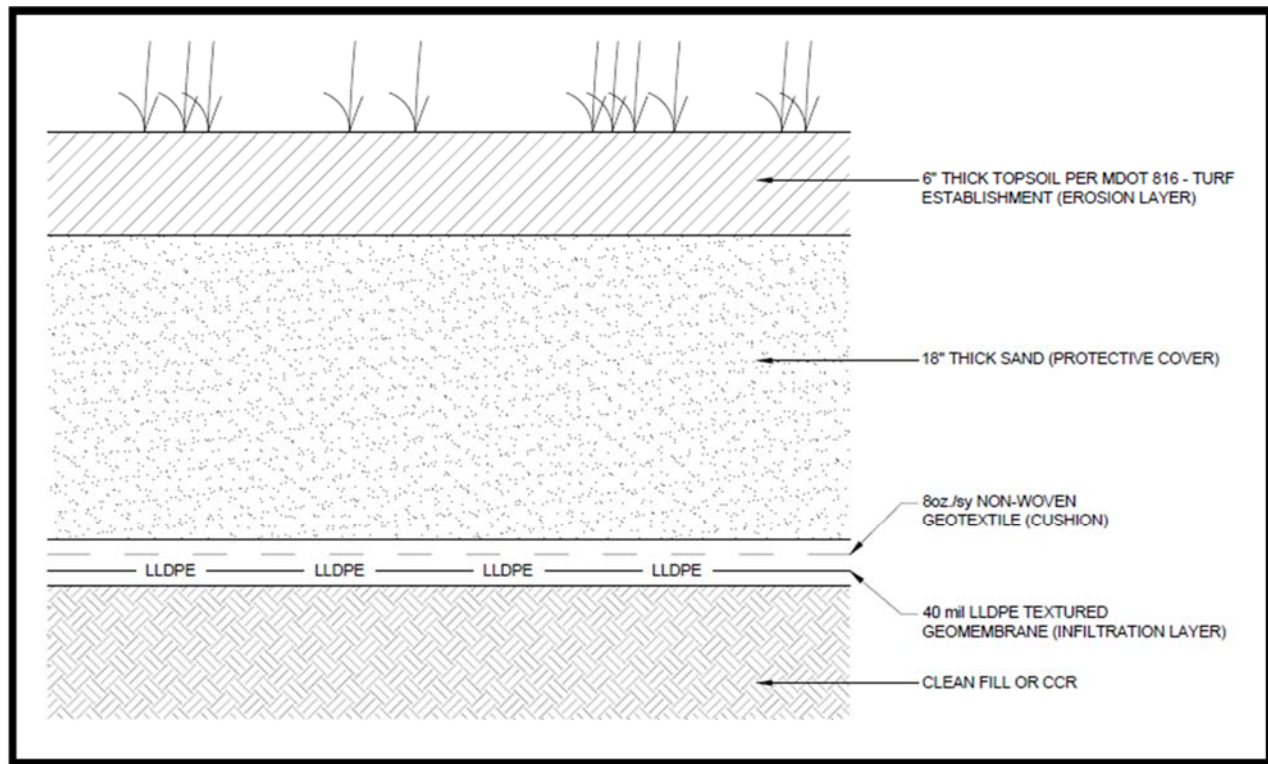**Figure 3.1 - Final Cover System**

2.2.2.2 Final Cover Construction

Ponds 0-8 will be filled to planned grade with readily available certified clean fill material. The certified clean fill material will be placed in areas above the static groundwater elevation in 12-inch-thick loose lifts compacted to at least 95 percent of the maximum dry density achieved by the Standard Proctor (ASTM D698). The certified clean fill material will be placed approximately two feet below the grades presented on Figure 3 – Closure Grading Plan, which allows the final cover system described in Section 2.2.2.1 to meet the grades as shown. Once the certified clean fill material has been placed to its design grades, the final cover system will be constructed and tested to confirm it meets the requirements of the designed final cover.



3.0 SCHEDULE [40 CFR 257.102(b)(1)(vi)]

3.1 Introduction

CEC will initiate closure by providing notification pursuant to 40 CFR 257.102(e) by October 1, 2018. In accordance with 40 CFR 257.102(f)(1)(ii), closure activities are expected to be completed within five years of the notification of intent to initiate closure (by October 2023).

3.2 Closure Construction

Ponds 0-8 will be closed simultaneously with the Bottom Ash Pond. The volumes, areas, and timeframes presented in this section are representative of Ponds 0-8 and the Bottom Ash Pond at BC Cobb.

On average, it is anticipated that 5,000 cy of fill can be hauled, placed, and compacted each day. This yields 56 working days or 12 weeks. Once the grading is complete, the 40 mil LLDPE geomembrane will be installed. It is assumed that two crews will be utilized for this project. Each crew can place approximately 45,000 square feet per day and; therefore, a daily production of 90,000 square feet is expected. Based on these assumptions, it is expected to take 15 working days or approximately three weeks to complete the geosynthetics installation.

Once the geosynthetics are installed, the protective cover can be placed over the nonwoven geotextile cushion. The protective cover will require placement of approximately 75,000 cy. Assuming a placement rate of 5,000 cy per day yields 15 working days or three weeks. The erosion layer will overlay the protective cover. Approximately 25,000 cy of erosion layer is required. Assuming a placement rate of 5,000 cy per day yields five working days or one week.

The erosion layer will require seed, fertilizer, and mulch and should be planted in mid-August so the seed can be established and cut before winter. With proper equipment, the closed area can be seeded, fertilized, and mulched in less than one week. A breakdown of the schedule is provided below in Table 3.2.1 – Closure Schedule Production Estimate.

**Table 3.2.1 – Closure Schedule Production Estimate**

Closure Component	Quantity	Units	Construction Rate	Rate Units	Required Time in Days
Grading layer fill	280,000	cubic yards	5,000	cubic yards per day	56
40-mil LLDPE geomembrane (infiltration layer)	1.35 million	square feet	90,000	square feet per day	15
18-inch-thick sand layer (protective cover)	75,000	cubic yards	5,000	cubic yards per day	15
6-inch-thick topsoil (erosion layer)	25,000	cubic yards	5,000	cubic yards per day	5
Seed, fertilizer, mulch (erosion layer)	1.35 million	square feet	300,000	square feet per day	5
Workdays Required =					96

It is anticipated that closure construction will begin on or before April 1, 2023 in order to comply with the closure schedule. Conservatively assuming a start to finish construction schedule, the final cover construction will take approximately 20 weeks. Using these assumptions results in completion of the final cover construction on August 11, 2023, which complies with the October 1, 2023 closure deadline. Table 3.2.2 – Conceptual Final Cover Construction Schedule Milestones contains a list of milestone dates that were developed as part of the closure construction schedule to demonstrate that closure will be completed within the self-implementing closure schedule per 40 CFR 257.102(f)(1)(ii).

**Table 3.2.2 – Conceptual Final Cover Construction Schedule Milestones**

Closure Component	Start Date	End Date
Monitor groundwater	January 1, 2016	October 1, 2023
Notification of closure	NA	October 1, 2018
Grading layer fill	April 3, 2023	June 16, 2023
40-mil LLDPE geomembrane (infiltration layer)	June 19, 2023	July 7, 2023
18-inch-thick sand layer (protective cover)	July 10, 2023	July 28, 2023
6-inch-thick topsoil (erosion layer)	July 31, 2023	August 4, 2023
Seed, fertilizer, mulch (erosion layer)	August 7, 2023	August 11, 2023
Closure activities complete	NA	October 1, 2023
Certified closure report	NA	December 31, 2023
Post-closure care period	January 1, 2024	December 31, 2053

3.3 Closure Deadline Extension [40 CFR 257.102(f)(2)]

As previously indicated in Section 3.1, closure of existing CCR surface impoundments must be completed within five years of initiating closure in accordance with 40 CFR 257.102(f)(1)(ii). A deadline extension can be obtained as outlined in 40 CFR 257.102(f)(2) if completion of closure is not feasible within five years (e.g., shortened construction season, significant weather delays during construction, time required for dewatering CCR, delays due to state or local permitting or approval, etc.). An extension must include a narrative description that demonstrates closure is not feasible in the required timeframe in accordance with 40 CFR 257.102(f)(2)(i, iii). The closure deadline for Ponds 0-8 may be extended up to two years per 40 CFR 257.102(f)(2)(ii)(A).





4.0 REFERENCES

Golder Associates Inc., B.C. Cobb Generating Facility Ash Pond Material Characterization Data Report. September 2016.

“Standards for the Disposal of Coal Combustion Residuals in Landfills and Surface Impoundments,” Title 40 – Protection of the Environment Part 257 – Criteria for Classification of Solid Waste Disposal Facilities and Practices Subpart D – Standards for the Disposal of Coal Combustion Residuals in Landfills and Surface Impoundments.

FIGURES

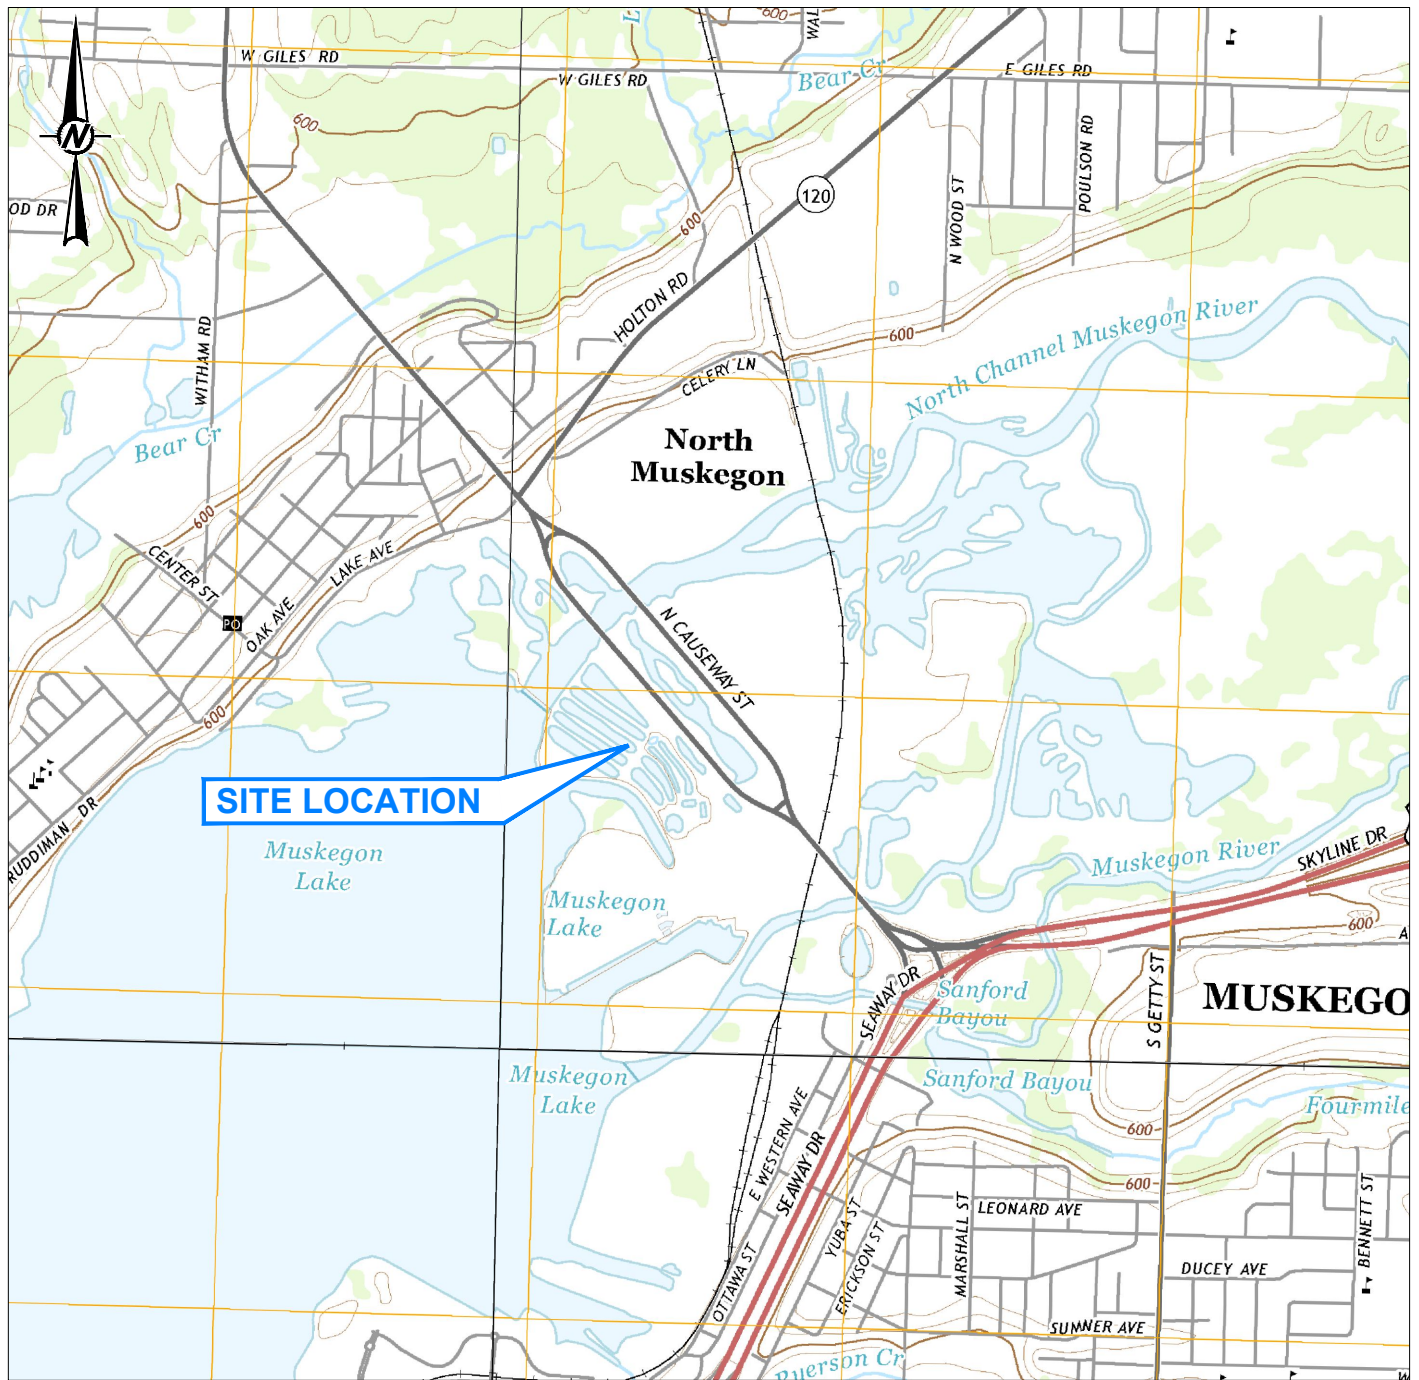

REFERENCE(S)

1. BASE MAP TAKEN FROM 7.5 MINUTE U.S.G.S. QUADRANGLES OF DALTON, TWIN LAKE, MUSKEGON EAST, AND MUSKEGON WEST, MICHIGAN, DATED 2014.



CLIENT
CONSUMERS ENERGY COMPANY
 151 N. CAUSEWAY
 MUSKEGON, MI 49445

CONSULTANT



YYYY-MM-DD 2016-06-14

DESIGNED JRP

PREPARED AM

REVIEWED JRP

APPROVED MAB

PROJECT
B.C. COBB PLANT
PONDS 0-8 CONCEPTUAL CLOSURE PLAN
 MUSKEGON, MI 49445

TITLE
SITE LOCATION MAP


PROJECT NO.
 1652598

CONTROL
 B001

REV.
 0

FIGURE
 1





GROUNDWATER MONITORING WELL

REFERENCE(S)

1.

TOPOGRAPHIC SURVEY PROVIDED BY SUMMIT SURVEYING, INC.; DATED JANUARY 28, 2015.


CLIENT

CONSUMERS ENERGY COMPANY

151 N. CAUSEWAY

MUSKEGON, MI 49445

CONSULTANT



YYYY-MM-DD	2016-09-28
DESIGNED	JRP
PREPARED	AM
REVIEWED	JRP
APPROVED	MAB

PROJECT

B.C. COBB PLANT

PONDS 0-8 CONCEPTUAL CLOSURE PLAN

MUSKEGON, MI 49445

TITLE

GENERAL SITE PLAN

PROJECT NO.	CONTROL	REV.	FIGURE
1652598	B002	0	2

Path: \\mfrs01\cadd\Projects\2016\1652598\B.C. Cobb Plant\Production\B - Ponds 0-8 Closure Plan.dwg | File Name: 1652598B002 - GENERAL SITE PLAN.dwg


1 in IF THIS MEASUREMENT DOES NOT MATCH WHAT IS SHOWN, THE SHEET SIZE HAS BEEN MODIFIED FROM: ANSI D



- LEGEND
- POND CLOSURE BOUNDARY (APPROXIMATE)
 - 595 PROPOSED FINAL GRADE MAJOR CONTOUR
 - 596 PROPOSED FINAL GRADE MINOR CONTOUR

- NOTE(S)
- BOTTOM OF CCR SURFACE DEVELOPED FROM 2015 GEOTECHNICAL INVESTIGATION.
 - PROPOSED FINAL GRADE CONTOURS REPRESENT TOP OF FINAL COVER (TOP OF EROSION LAYER).

- REFERENCE(S)
- TOPOGRAPHIC SURVEY PROVIDED BY SUMMIT SURVEYING, INC.; DATED JANUARY 28, 2015.



Cut/Fill Summary

Name	Cut Factor	Fill Factor	2d Area	Cut	Fill	Net
VOL-4	1.000	1.000	1266933.54 Sq. Ft.	2998.33 Cu. Yd.	375518.77 Cu. Yd.	372520.44 Cu. Yd.<Fill>
Totals			1266933.54 Sq. Ft.	2998.33 Cu. Yd.	375518.77 Cu. Yd.	372520.44 Cu. Yd.<Fill>

CLIENT
CONSUMERS ENERGY COMPANY
151 N. CAUSEWAY
MUSKEGON, MI 49445

CONSULTANT



YYYY-MM-DD	2016-06-14
DESIGNED	JRP
PREPARED	AM
REVIEWED	JRP
APPROVED	MAB

PROJECT
B.C. COBB PLANT
PONDS 0-8 CONCEPTUAL CLOSURE PLAN
MUSKEGON, MI 49445

TITLE
CLOSURE GRADING PLAN

PROJECT NO. 1652598	CONTROL B003	REV. 0	FIGURE 3
------------------------	-----------------	-----------	-------------

Established in 1960, Golder Associates is a global, employee-owned organization that helps clients find sustainable solutions to the challenges of finite resources, energy and water supply and management, waste management, urbanization, and climate change. We provide a wide range of independent consulting, design, and construction services in our specialist areas of earth, environment, and energy. By building strong relationships and meeting the needs of clients, our people have created one of the most trusted professional services organizations in the world.

Africa	+ 27 11 254 4800
Asia	+ 852 2562 3658
Australasia	+ 61 3 8862 3500
Europe	+ 356 21 42 30 20
North America	+ 1 800 275 3281
South America	+ 56 2 2616 2000

solutions@golder.com
www.golder.com

Golder Associates Inc.
15851 South U.S. 27, Suite 50
Lansing, MI 48906 USA
Tel: (517) 482-2262
Fax: (517) 482-2460



Engineering Earth's Development, Preserving Earth's Integrity

Golder, Golder Associates and the GA globe design are trademarks of Golder Associates Corporation